


CINTA LED ROLLO

PROFESIONAL /
PROFESSIONAL



CARACTERÍSTICAS / CHARACTERISTICS


Rollo de 100 m de cinta led. Para uso en aplicaciones interiores y exteriores

LED strip 100 m reel. For use in indoor and outdoor applications



DIMENSIONES DE PRODUCTO Y EMPAQUE / PRODUCT AND PACKAGING DIMENSIONS

Formato Format	DIM. DE LÁMPARA LAMP DIM A(mm) B(mm)		DIM. DE CAJA MASTER MASTER BOX DIM L(cm) W(cm) H(cm)			UNIDADES / CAJA MASTER UNITS / MASTER BOX	CBM (MASTER)
6500K/3000K	12	6.5	32.5	32	20	1	0.021
RGB	15	7	32.5	32	20	1	0.021

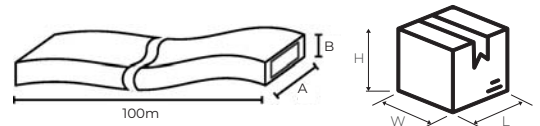

INFORMACIÓN TÉCNICA / TECHNICAL INFORMATION

Código SKU	Descripción Description	Potencia Power (W)	Flujo Luminoso Flux (lm)	TCC CCT (K)	Tensión Voltage (V~)	IRC CRI	Distancia Corte Cutting Distance (cm)	Factor de potencia Power Factor (PF)
90576190A	CINTA LED 100M 6500K	7	600	6500	120	>80	20	>0.9
90576188A	CINTA LED 100M 3000K	7	550	3000			20	
90576191A	CINTA LED 100M RGB	8	-	RGB			100	

NOTAS / NOTES

El cable de poder debe ser instalado en caja hermética en cumplimiento del código eléctrico vigente.
Toda línea debe terminar con una tapa final y silicona.
The power cord must be installed in a hermetic box in compliance with the current electrical code.
Always end a line with an end cap and glue.



ACCESORIOS / ACCESSORIES

Modelo Model	CABLE DE PODER POWER CORD CÓDIGO / CODE	UNIÓN UNION CÓDIGO / CODE	TAPA FINAL END CAP CÓDIGO / CODE	CLIP CÓDIGO / CODE
6500K / 3000K	90576194A	90576195A	90576192A	90576197A
				
RGB	90576193A	90576196A	90576198A	90576197A
				

APLICACIONES / APPLICATIONS

