

BOLLARD LED

EXTERIOR / OUTSIDE



CARACTERÍSTICAS / CHARACTERISTICS


El bollardo LED ofrece un estilo arquitectónico con un cuerpo en aluminio extruido redondo de 6 pulgadas de una sola pieza con paredes laterales gruesas para una durabilidad extrema, una lente acrílica transparente de alto impacto y una tapa superior soldada. Las partes exteriores están protegidas por un acabado de recubrimiento en polvo termoestable súper duradero con infusión de zinc que proporciona una resistencia superior a la corrosión y la intemperie para una máxima retención de brillo y lustre que puede soportar los elementos sin agrietarse ni descascararse. Ideal para iluminar entradas de edificios, senderos y plazas peatonales, así como cualquier otro lugar que requiera una fuente de luz de baja altura.

The LED bollard offers architectural styling with a one-piece 6-inch round extruded aluminum body with thick sidewalls for extreme durability, a high-impact clear acrylic lens, and a welded top cap. Exterior parts are protected by a super durable, zinc-infused, thermosetting powder coat finish that provides superior corrosion and weather resistance for maximum gloss and luster retention that can withstand the elements without cracking or chipping. Ideal for illuminating entrances to buildings, paths and pedestrian squares, as well as any other place that requires a low light source.



DIMENSIONES DE PRODUCTO Y EMPAQUE / PRODUCT AND PACKAGING DIMENSIONS

Formato Format	DIM. DE LUMINARIA LUMINAIRE DIM A(mm) B(mm)		DIM. DE CAJA MASTER MASTER BOX DIM L(cm) W(cm) H(cm)			UNIDADES / CAJA MASTER UNITS / MASTER BOX	CBM (MASTER)
STANDARD	90	800	83	62	31	8	0.160

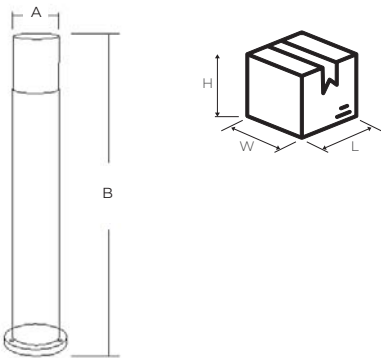

INFORMACIÓN TÉCNICA / TECHNICAL INFORMATION

Código SKU	Descripción Description	Potencia Power (W)	Flujo Luminoso Lum. Flux (lm)	Tensión Voltage (V~)	IRC CRI	Factor de potencia Power Factor (PF)	TCC CCT (K)
60891216A	LUM BOLARDO ILUK	12	1500	120-277	>70	>0.60	5000

APLICACIONES / APPLICATIONS

