


SOLARIS STREETLIGHT

SOLAR / SOLAR



GARANTÍA /
WARRANTY

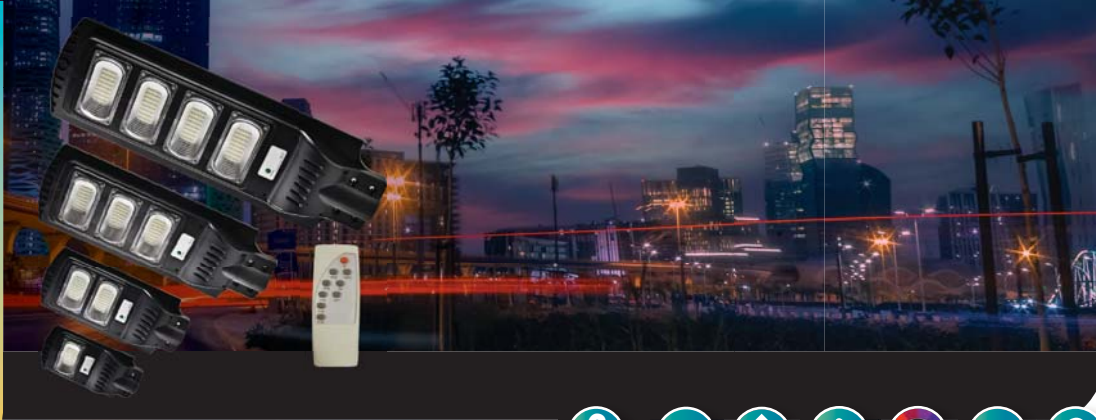

20.000 h
HORAS VIDA /
LIFESPAN



100°



0°C - 50°C



IRC
370



IP66



IK04



CARACTERÍSTICAS / CHARACTERISTICS

Luminaria solar libre de cables y de fácil instalación. Con sensor de presencia integrado y batería de Li-ion. Con encendido automático. Tiene control remoto para funciones de apagado y encendido, atenuación y temporizador. Contando un panel solar policristalino de alta eficacia y un cuerpo construido en material ABS.



Solar luminaire free of cables and easy to install. With integrated presence sensor and Li-ion battery. With automatic ignition. It has remote control for on/off, dimming and timer functions. Featuring a high-efficiency polycrystalline solar panel and a body constructed of ABS material.



DIMENSIONES DE PRODUCTO Y EMPAQUE / PRODUCT AND PACKAGING DIMENSIONS

Modelo Model	DIM. DE LUMINARIA LUMINAIRE. DIM A(mm) B(mm)		DIM. DE CAJA MASTER MASTER BOX. DIM L(cm) W(cm) H(cm)			UNIDADES / CAJA MASTER UNITS / MASTER BOX	CBM (MASTER)
30W	195	390	41	32.5	42	10	0.056
60W	220	485	50	32.5	24	5	0.039
90W	240	620	64	32.5	26	5	0.054
120W	240	720	74	32.5	26	5	0.063

*Diámetro brazo 42-52mm
*Arm diameter 42-52mm



OPERACIÓN OPERATION



La luminaria Solaris Streetlight se enciende automáticamente cuando la luz ambiente es baja, ≤ 50 lx. Encenderá al 100% de su brillo durante 15 segundos cuando se activa el sensor, y en caso de no sentir movimiento pasa a modo ahorro, 30% del brillo máximo. Otras configuraciones desde el control remoto.

The Solaris Streetlight luminaire turns on automatically when ambient light is low, ≤ 50 lx. It will turn on at 100% of its brightness for 15 seconds when the sensor is activated, and in case of not sensing movement it goes to saving mode, 30% of the maximum brightness. Use remote control to set other configurations.




INFORMACIÓN TÉCNICA / TECHNICAL INFORMATION

Código SKU	Descripción Description	Potencia LEDs LEDs Power (W)	Potencia Panel Panel Power (W)	Flujo Luminoso Flux (lm)	Tiempo de carga Charging time (horas / hours)	Tiempo de operación Operation time (noches / nights)	TCC CCT (K)	Batería Battery
60525530A	SOLARIS STREETLIGHT 30W*	4	8	500	12	2	6500	5000 mAh, 3.2V
60574408A	SOLARIS STREETLIGHT 60W*	8	12	900				10000 mAh, 3.2V
60574409A	SOLARIS STREETLIGHT 90W*	12	15	1400				15000 mAh, 3.2V
60512016A	SOLARIS STREETLIGHT 120W*	13.5	18	1600				18000 mAh, 3.2V

- * En referencia a incandescente por flujo luminoso
- * According to an incandescent by luminous flux

OPERACIÓN DEL SENSOR / SENSOR OPERATION



APLICACIONES / APPLICATIONS



ILUKON
PROFESSIONAL LIGHTING

